

# BODLINE

## Fire Hose Coated on Both Sides




- majority chemicals and sea water high resistance
- UV and ozone high resistance
- abrasion high resistance
- very good adhesion

technical info:

Hose type	BODLINE			
Hose description	firefighting, sea transport, industry, construction			
Material				
- outside material	polyester yarn			
- inside material	pvc/rubber			
Inner diameter	52 (+1,5/-0,5) mm		75 (+1,5/-0,5) mm	
Hose length*	20 ±0,5 m	15 ±0,5 m	20 ±0,5 m	15 ±0,5 m
Hose weight				
- with couplings (LA)	7,90 kg	5,50 kg	13,30 kg	10,12 kg
Temperature range	-20°C to +70 °C			
Operating pressure	15 bar			
Test pressure	22,5 bar			
Burst pressure	45 bar			

type of coupling:

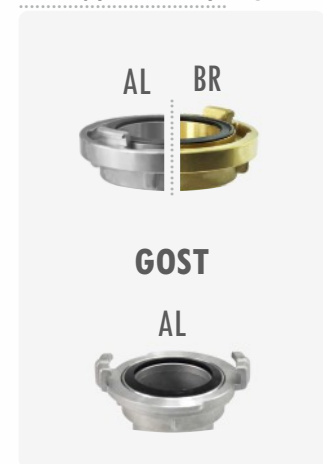

\*

At the customer's request we can prepare hoses in length from 1 m to 60 m.

